


# HS-128NWC

A Nice WiFi Camera, for you only

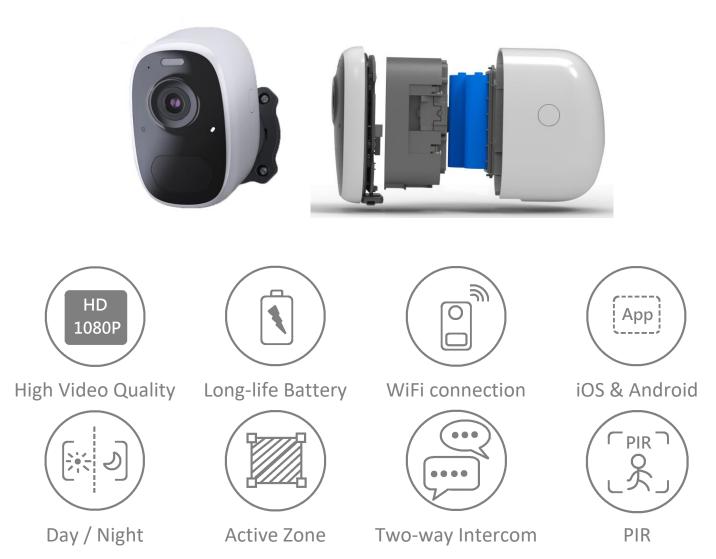

#### **Features**

- Best choice of wireless battery camera with 1080P resolution
- Al functions (PIR, human contour, customized activity zone etc.)
- iOS & Android app for remote live video and playback
- Two-way audio for instant communication

## Hot Stuff Intl 🕸

- Cloud/Micro SD card/Mobile phone storages
- Elegant, small size & easy installation for wall & ceiling

#### **Specifications**

Hardware	
Processor	SOC: HI3518E V300 (a dominant frequency of 900MHz) DDR: 512M
Image sensor	Sensor: 1/3" color CMOS Sensor
	Lens: M12, f: 2.8mm, F2.0, 2-megapixel
	Visual angles: H @ 95 degrees / V @ 55 degrees / D (diagonal) @ 110
	degrees
	Min. Illumination: 0.01 Lux
Wireless	2.4GHz, 802.11n with built-in antenna
Storage	Local: Micro SD card up to <u>128GB</u>
	Remote: Smart phone storage
	Cloud server (with charge):
	Europe & America operating
	Asia under construction
	Africa not ready
Day& Night	Both color display (Mid-power infrared lamp (850nM in wavelength) /
Buya Mgitt	irradiation distance of 7m
Audio	AAC, two-way voice intercom available
Video	H.265, 15ftps with 1920*1080P resolution
LED indicators	Power/ Network / Function
Battery (built-in & removable))	Capacity: 5200mAh
	Charging voltage: DV 5V+-5%/1.5A
	Charging & Operating: 8hr charging for 6 months
	(provided that 20 10s videos are recorded per day)
	Protection mechanism: over-current/over-discharge/over-charge/short
	circuit/charging protection at high & low temperatures
Power consumption	Standby: 2.4mW (3.8v / 0.63mA)
	Daytime: 1W (3.8v / 264mA)
	Night: 2.23W (3.8v / 588mA)
Interfaces	Micro USB x1
	Micro SD card slot x1
	Reset button x1

### Hot Stuff Intl 💖

	Power button x1
Functions	
AI functions	PIR, smart detection zone, human contour detection, alarm push via App
	etc.
Auto-flip	Built-in gravity sensor to auto-flip the image when installed on ceiling / wall
Арр	Both iOS & Android
Quick setup	Scan QR code for fast intelligent connection and network allocation
Wake-up	PIR body induction, active by remote control
Recording	Alarm triggered or manually
Upgrade	Both firmware & function improvement via wireless network
Compression	H.265 video compression algorithm for high quality video but less bandwidth
Intercom	Two-way voice intercom supported; echo eliminated; noise suppressed
Environment	
Operating	Operating: -10 ~ 45 Celsius degree/ 0% ~ 80% no condensation
temperature	Storage: -20 ~ 60 Celsius degree / 0% ~ 90% no condensation
Enclosure	IP65 (ABS + PC)
Physical	
Dimension	84mm*62mm*92.5mm (with bracket excluded)
Weight	575gs approx.



Provided by Hot Stuff Intl. Co., Ltd. For more information, contact: service@hotstuff.com.tw