


HS-60A

Lightning Surge Protector

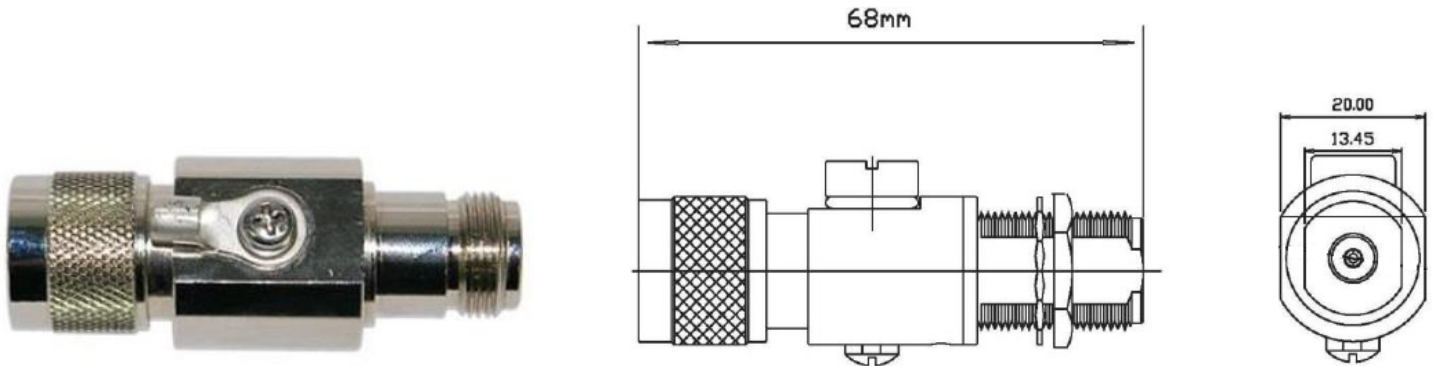

Key Features

- 0~6.0GHz operating frequency
- N female to N male connectors
- Max. 10KA withstanding current

Specifications

| Radio | |
|---------------------------|--------------------|
| Frequency range | 0~6GHz |
| V.S.W.R. | < 1.5 |
| Insertion loss | 0.2dBi |
| Impedance | 50 Ohm |
| DC Breakdown Voltage | 90V DC @ 100V/S |
| Max. withstanding current | 10KA |
| Interfaces | |
| Connectors | N female to N male |
| Environment | |
| Dimension | 68*32*20mm |
| Weight | 130g |