

HS-N2F Outdoor Wireless Unit

MIMO OFDM PtP/PtMP



Key Features


- Standard 2.4GHz operating frequency
- MIMO HT-OFDM modulation
- Built-in 10dBi directional antenna
- ESD protection on-board
- OpenWRT supported
- IP55 enclosure

Specifications

Radio	
Frequency	Standard 2.4GHz
Channel width	5/10/20/40MHz
Modulation	MIMO HT-OFDM
Antenna	Built-in 10dBi MIMO antenna
Data rate	
Wireless	Up to 300Mbps
Interfaces	
Mini USB	1x
LAN	2x 10/100Mbps RJ45 ports (PoE in / PoE out)
Reset button	1x
Security	
Data Encryption	WEP, WPA, WPA2-PSK, WPA3 SAE

Hot Stuff Intl

Advanced	Traffic shaping (MAC filtering), Virtual VLAN
Software functions	
Management & setup	Web-based via popular browser (Chrome, Edge)
Radio Locator	N/A
Network architecture	PtP / PtMP
Protocol	TCP/IP
Antenna alignment	Via LED indicators (signal strength)
Power supply	
Power supply	AC 100~240V / DC 12~24V Passive PoE
Environment	
Operating temperature	-20 ~ +60° C
Humidity	10% ~ 90% non-condensing
Physical	
Dimension	Approx. 300(L) * 90(W) * 50(H) mm
Weight	500gs
Standard accessories	
24v PoE, straps	
Optional accessory	
Adjustable bracket kit (as shown below)	

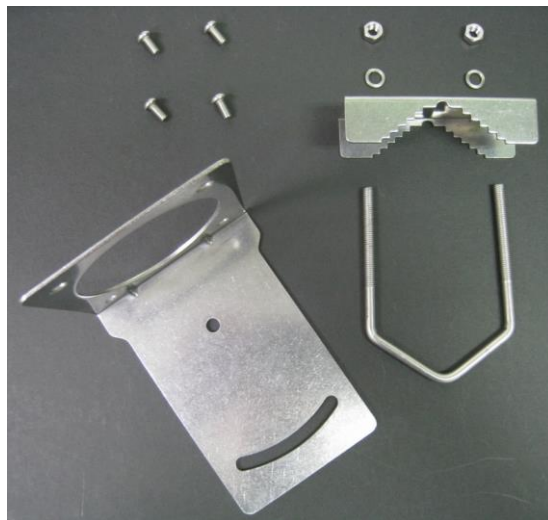

Provided by Hot Stuff Intl. Co., Ltd.

For more information, contact: service@hotstuff.com.tw